


CENTROTECNICA

stress to ensure

SHAKER LDS V824 LS WITH SLIP TABLE

Electrodynamic shaker for vibration tests with slip table for three axes tests execution.

Very flexible system, suitable for different kind of tests and adjustable for a wide selection of products.

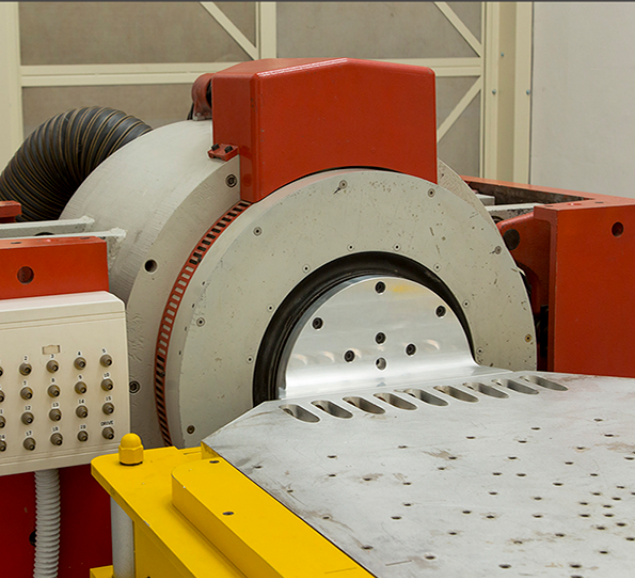

FEATURES AND PERFORMANCE

Force sine (peak): 24 kN

Maximum acceleration: 100 g pk sine / 60 g rms random

Maximum displacement: 38,1 mm (pk-pk)

Usable frequency range: 5 - 3000 Hz

Armature diameter: 335 mm + optional expander

Slip table size: 750 x 950 mm

Internal load support capacity: 450 kg

Number of controller channels: up to 32

Tests: Sine, Random, Shock, Sine on Random, Dwell,...

For info or RFQs, pls contact us at mail: info@ctecnica.it - phone: +39(0)255305888